

## **Power Pro Series**

**400/600/800/1000/1500/2000USA**


**The Best Protection for PCs, Peripherals,  
P.O.S., Alarm & Phone Systems**

### **Features:**


- Advance Battery Management, Increases Longevity, Performance, and Reliability
- AVR (Automatic Voltage Regulation Provides Stable Power)
- Convenient DC Cold Start Function
- USB Communication Interface
- Safe Automatic System Shutdown Software
- Fax/ Modem/ and Phone Surge Protection (RJ11)
- Visual Battery Load Indicator on (Power Pro 1000, 1500, 2000)
- Network Protection (RJ45) models 1000/ 1500/ 2000VA



## Power Pro 400/600/800 USA rear panel

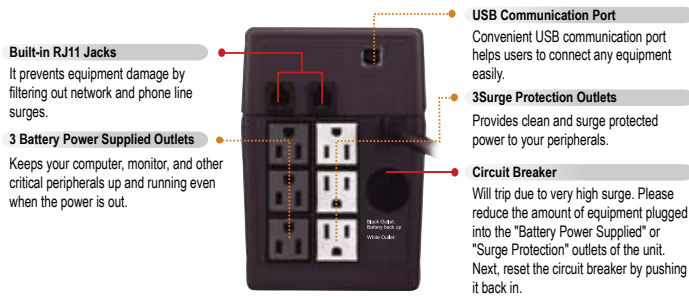

## Power Pro 1000/1500/2000 USA rear panel

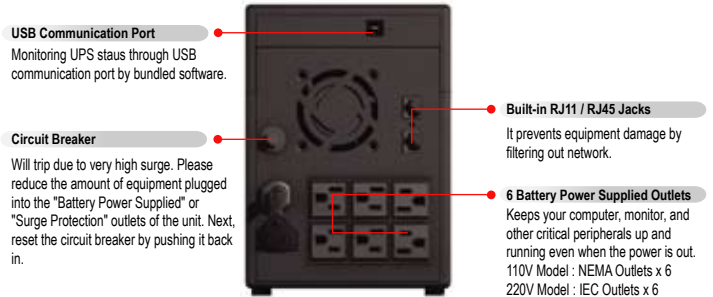

## POWER PRO LINE INTERACTIVE UPS SPECIFICATION

MODEL		PRO-400 USA	PRO-600 USA	PRO-800 USA	PRO-1000 USA	PRO-1500 USA	PRO-2000 USA
<b>CAPACITY</b>	VA/W	400VA/ 240W	600VA/ 360W	800VA/ 480W	1000VA/ 600W	1500VA/ 840W	2000VA/ 1080W
<b>INPUT</b>	Voltage	120VAC, 110VAC/230VAC(220/240VAC)					
	Voltage Range	85-140VAC / 162-290VAC					
<b>OUTPUT</b>	Voltage	120VAC, 110VAC/230VAC(220/240VAC)					
	Voltage Regulation (Battery Mode)	±10%					
	Frequency	50Hz or 60Hz					
	Frequency Regulation (Battery Mode)	+/-1 Hz					
	Output Waveform	Modified Sine wave					
<b>BATTERY</b>	Battery Type and Number*	12V4.5Ah x 1	12V7Ah x 1	12V9Ah x 1	12V/7AH x 2	12V/9AH x 2	
	Back up Time (at PC load with 15" monitor)	12 minutes	20 minutes	29 minutes	40 minutes	50 minutes	55 minutes
	Recharge Time	8 hours to 90% after complete discharge			10 Hours to 90% after complete discharge	8 Hours to 90% after complete discharge	
<b>TRANSFER TIME</b>	Typical	4-6ms					
<b>PROTECTION</b>	AC Surge Protection	Full time, 750 joules					
	Phone/fax/DSL/Network Surge Protection	RJ-11/45(One In One Out)					
	EMI/RFI Filter	Full time					
	AC Input	Circuit breaker					
	Full Protection	Overcharge and Overload Protection					
<b>PHYSICAL</b>	Dimension, DxWxH (Inches)	12.9X3.9X5.5			15.7X5.7X8	11.4X35.5X7	
	Net Weight (lbs)	11.02	13.22	14.33	21.16	31.52	35.27
<b>ENVIRONMENT</b>	Operating Environment	0- 40°C, 0-90 % Relative Humidity (non-condensing)					
	Noise Level	AC Mode: Less than 40dB Backup Mode: Less than 45dB					
<b>INTERFACE</b>	USB	Windows 98/2000/ME/XP and MAC					

\* Product specifications are subject to change without further notice

\*All TradeMarks Belong To Their Respective Parties

© 2007 Maruson Technology Corporation. All Rights Reserved.

**MARUSON**<sup>®</sup>  
**TECHNOLOGY**  
Power Solutions for All Your Needs

## Maruson Technology Corporation

18557 East Gale Ave. City of Industry, CA 91748, U.S.A.

International Phone: 626-912-8388 Fax: 626-912-8680 TollFree:1-888-MARUSON

E-Mail: Info@MarusonUSA.com Web Site: www.MarusonUSA.com